

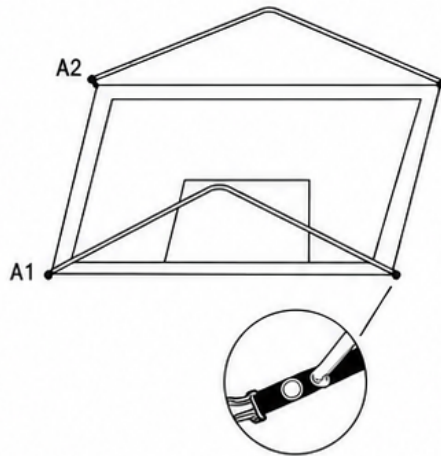


Accessories display

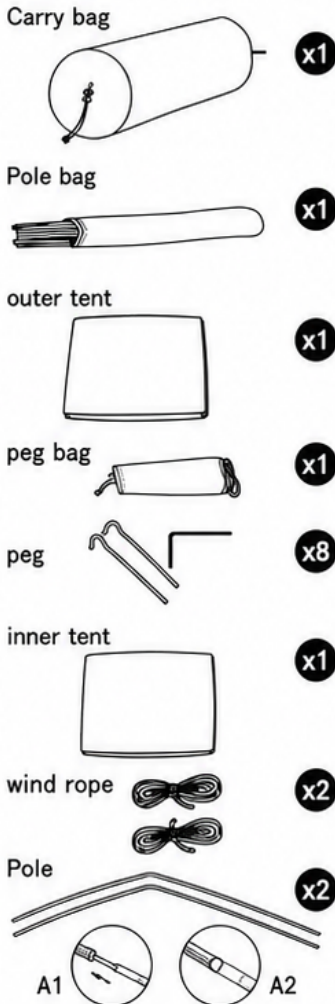


2

Spread the inner tent flat on the ground, and insert the two support rods A1 and A2 parallel into the holes at the four corners of the inner tent. (illustrated above)

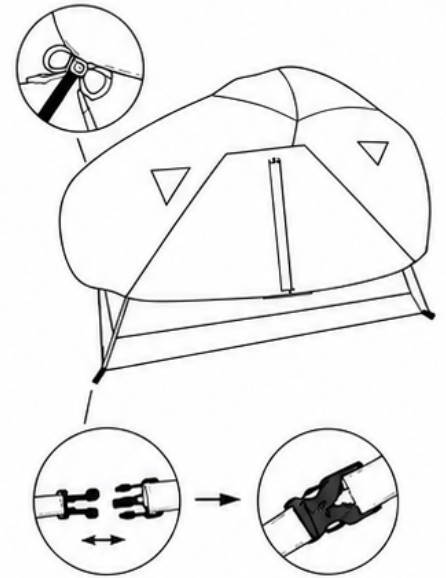

4

Put on the outer tent, tie the straps on the inner side of the outer tent to the support rod, and then connect the four corners at the bottom of the outer tent to the four corners of the inner tent with buckles for fixation. (illustrated above)

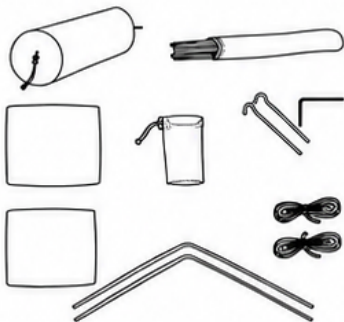


1

Take out the tent, pole bag, and peg bag from the outer bag, and choose a level area and flat ground to start building to prevent sharp objects from scratching the bottom. Assemble the support rod. (illustrated above)



3

Cross the two support rods A1 and A2 (illustrated above), and hang the black hooks on the inner tent one by one onto the support rods. The inner tent is assembled.

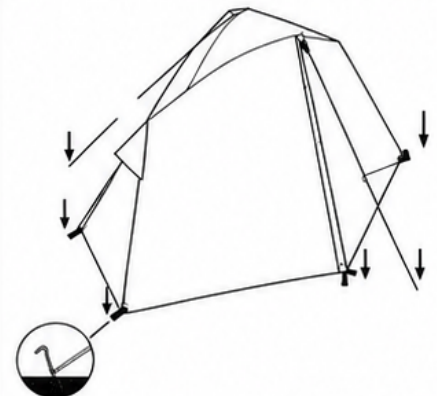

The outer tent is fixed to the ground with pegs, and finally a wind rope is tied. The other end of rope is fixed to the ground with pegs. (illustrated above) The elasticity of the rope can be adjusted by adjusting the buckle.